



SIR-4100 Series

MICROWAVE WIDEBAND RECEIVER UP TO 40 GHz



**WIDE FREQUENCY RANGE:
0.1 - 40 GHz**

FEATURES

- High Dynamic Range
- Fast Switching Synthesizer with 20 Hz Tuning Resolution
- Excellent Phase Noise Performance: $< 0.5^\circ$ RMS
- Wideband Output: 1.8 GHz CF Output, with 1000, 500, 200 and 100MHz BWs
- IF Output: 160 MHz CF IF Output with selectable BW
- IF Output: 70MHz Reconstructed with selectable BW from 3.2kHz-40MHz
- Manual Gain Control with Adjustable Threshold
- Advanced Front Panel Graphical Display
- Ethernet 10/100 BaseT, RS 232, RS 485
- 2 U, 19" Rack

APPLICATION

- ELINT
- Synthetic Instrumentation
- Emission Compliancy Testing
- SATCOM
- Radar Warning Receivers (RWR)



OPERATOR INTERFACE

- Color Spectral Display (LCD) with Front Panel Control
- Multimode Panoramic and IF Spectral Display with up to 80 MHz BW
- Ability to edit Sweep and Scan mode from the front panel
- Multicolor function designators
- Configuration Restores automatically after off / on iteration
- Temperature Monitoring and automatic shut down
- Interactive Main and Temporary Frequency List Mode editing from the front panel
- Ability to choose threshold levels of the ANRT
- Front Panel IF Bandwidth Selection (10 MHz / 20 MHz / 40 MHz / 80 MHz)

REMOTE INTERFACE

- Audio and Spectral Display Over Ethernet with GUI
- Ethernet and RS 485 Control
- USB 3 for uploading recorded I/Q


IF DIGITIZER

- 100 dBFS (dB Full Scale) Spurious Free Dynamic Range, 16 BIT ADC
- 40 MHz Signal Processing Bandwidth (80 MHz Optional) Contact Factory

SDR SOFTWARE DEFINED RADIO

- Low Power STRATIX 5 FPGA Implementation
- IF Filtering From 10 KHz Up to 40 MHz
- AM, FM, LOG, CW, ISB Demodulation
- 90 dB Manual or Automatic Gain Control (MGC, AGC)
- IF Up Conversion to 70 MHz
- Adaptive Noise Riding Threshold Squelch

TYPICAL DISPLAY

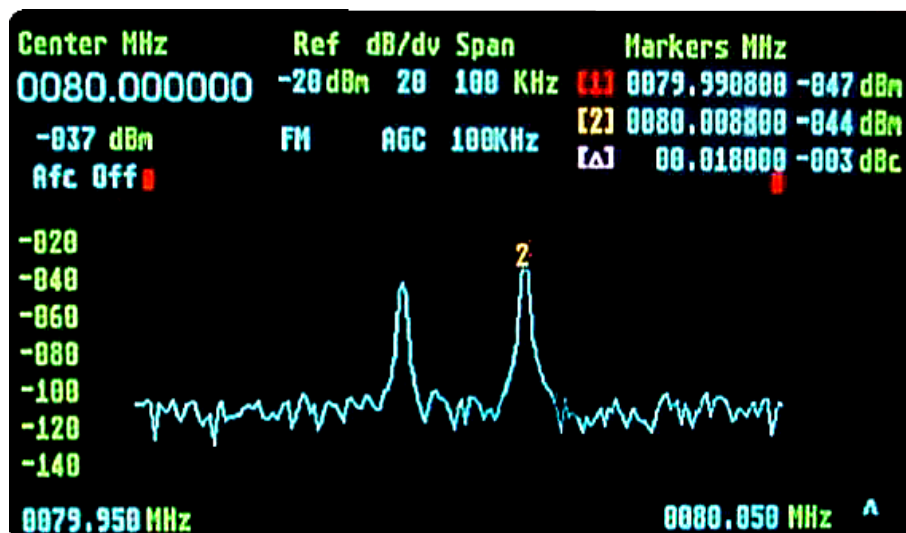



SPECIFICATIONS AT 25°C

FREQUENCY

Frequency Tuning Range:	0.1 – 40 GHz (see ordering matrix page 8 for input frequency options)	
Tuning Resolution:	20 Hz	
Synthesizer Tuning Speed:	50 usec	
Frequency Accuracy vs. Temp (Internal Ref):	< +/- 0.1 PPM	
Long Term Aging (Internal Ref):	< 1 PPM per year	
External Reference Input:	10 MHz at 0 +/- 3 dBm, Auto locking	
Phase Noise (Typ.):	0.5°RMS Integrated from 100 Hz to 10 MHz	

	<u><26.5GHz</u>	<u>26.5-40GHz</u>
Offset 100 Hz:	-68 dBc/Hz	-68 dBc/Hz
Offset 1 KHz:	-87 dBc/Hz	-87 dBc/Hz
Offset 10 KHz:	-95 dBc/Hz	-95 dBc/Hz
Offset 100 KHz:	-101 dBc/Hz	-100 dBc/Hz
Offset 1 MHz:	-117 dBc/Hz	-112 dBc/Hz
Offset 10 MHz:	-130 dBc/Hz	-125 dBc/Hz

SCAN AND SWEEP

Sweep Mode:	F1 to F2 at Selected Frequency Step
Sweep Rate:	<500 usec in-band
Dwell Time:	From 1 msec to 60 sec or Stop on Detection
Adjustable Threshold Detection (Squelch):	1 dB step from -15 dBm to -120 dBm at RF Input
External Trigger:	Strobe Input

RF SECTION

Input VSWR:	2.5 : 1
RF Preselector:	10 Bands (GHz): 0.1-1.33, 1.33-1.75, 1.75-2.0, 2.0-6.0, 6.0-7.5, 7.5-10, 10-13.5, 13.5-18, 18-26.5 and 26.5-40
Noise Figure (30dB Gain):	15 dB (Max.) from 1-26.5GHz 17 dB (Max.) from 0.1-1 GHz and 26.5-40 GHz
Max Input Level (without damage):	+20 dBm (0.1 - 26.5GHz), +10 dBm (26.5 – 40GHz)
Max Input Level (operating):	-15 dBm (20 dB gain)
Conversion Sense:	Non Inverting
RF Gain Variation:	+/- 1.5 dB vs. RF Input Frequency Range



SPECIFICATIONS AT 25°C

DYNAMIC RANGE

Linear Dynamic Range:	80 dB with 1 MHz BW from 0.1-26.5GHz 75 dB with 1 MHz BW from 26.5-40GHz
Image Rejection:	65 dB min from 0.1-26.5GHz 55 dB min from 26.5-40GHz
LO Re-radiation:	< -80 dBm at RF Input from 0.1-26.5GHz < -70 dBm at RF Input from 26.5-40GHz
Input IP3:	-5 dBm @ 20 dB Gain from 0.1-26.5GHz -10 dBm @ 20 dB Gain from 26.5-40GHz
Input 1 dB Compression:	-15 dBm @ 20 dB Gain from 0.1-26.5GHz -20 dBm @ 20 dB Gain from 26.5-40GHz
In Band Spurious Carrier Dependent (30dB Gain with -15 dBm output level):	-60 dBc typical, -50 dBc max
Internally Generated with 20 dB Gain:	-85 dBm typical, -75 dBm max (equivalent to Input)

WIDEBAND L BAND OUTPUT

Center Frequency:	1.8 GHz
Bandwidth (3dB):	1000MHz, 500MHz, 200MHz, 100MHz selectable (2-40GHz) 200MHz (1.33-2GHz) and 100MHz (0.1-1.33GHz)
RF to IF Gain:	30 dB
Gain Ripple Over 80% IF BW:	+/- 2 dB (Typ), +/- 2.4 dB (Max) from 0.1-40GHz
Gain Slope over 80% IF BW:	< 2.5 dB
Group Delay Variation:	3 nsec max over 80% of 3 dB BW (1000, 500 MHz BW) 6 nsec max over 80% of 3 dB BW (200 MHz BW)
Manual Gain Control (MGC):	Settable 0 to 30 dB, 1 dB Resolution
Automatic Gain Control (AGC):	No AGC
Impedance:	50 ohms
VSWR:	2:1 Max
Wideband Signal Monitor:	-20 dBc Typical



IF OUTPUT

Center Frequency :	160 MHz
Bandwidth (3 dB):	1, 5, 10, 20, 40 & 80 MHz selectable
Gain Flatness Over 80% IF BW:	+/- 0.8 dB (Typ.), +/- 1.2 dB (Max.)
RF to IF Gain:	30 dB
Manual Gain Control (MGC):	Settable 0 to 30 dB, 1 dB Resolution
Automatic Gain Control (AGC):	Not Available
Automatic Overdrive Protection Level:	sets automatic overdrive protection for IF level over +5dBm in order to prevent digitizer overdrive (will automatically reduce analog IF gain)
IF Output Impedance:	50 ohm
VSWR:	2.0:1 Max
IF Signal Monitor:	-20 dBc (Typ.)

70 MHz RECONSTRUCTED IF OUTPUT

Bandwidth (3 dB):	3.2 KHz, 6.4 KHz, 10 KHz, 15 KHz, 20 KHz, 30 KHz, 50 KHz, 100 KHz, 200 KHz, 300 KHz, 400 KHz, 800 kHz, 1 MHz, 2MHz, 5 MHz, 10 MHz, 20 MHz, 40 MHz
Group Delay:	Linear phase FIR design for 3.2 KHz to 20 MHz IF BW (all of the above)
Gain Flatness over 80% of IF BW:	± 0.4 dB (Typ.), ± 0.6 dB (Max.)
Manual Gain Control (MGC):	Settable 0 to 90 dB, 1 dB Resolution
Automatic Gain Control (AGC):	90 dB Range, Fast Attack, Programmed Decay
Fast Attack:	2 msec for 45 dB Change, 2 msec During Sweep or Scan
Decay Time:	Programmed from 1 msec to 1 second
IF Output Level:	Programmed from -20 dBm to +5 dBm, 1 dB Step
Output Compression Level:	+5 dBm



PRF TONE OUTPUT (70 MHz IF Out)

Stretched Audio
(for bandwidths of 40MHz, 20 MHz, 10MHz, 5 MHz, 1MHz only)

LOG VIDEO OUTPUT (70 MHz IF Out)

Dynamic Range: 70 dB
Output Level: 2.0 VDC Full Scale
Linearity: ± 1.5 dB
Impedance: 50 ohms

FM VIDEO DEMODULATOR (70 MHz IF Out)

Output Level: 1 Vp-p for 2/3 of selectable IF Bandwidth
Coupling: DC
Video Response (3 dB): 40% of IF Bandwidth
FM Gain: 0.1 to 1 Vpp
Connector Type: BNC-F
Impedance: 50 ohms

AM VIDEO DEMODULATOR (70 MHz IF Out)

Output Level: 1 Vp-p $\pm 10\%$ for -10 dBm IF Output
Coupling: DC
Video Response(3 dB): 40% of Reconstructed IF Bandwidth
Video Gain: 0.1 to 1 Vp-p adjustable
Connector Type: BNC-F
Impedance: 50 ohms

AM AUDIO OUTPUT (70 MHz IF Out)

Level: 1 Vp-p for -10 dBm IF Output
Response: 300 Hz to 3.3 KHz, -3 dB
Attenuation Range: 30 dB, 1 dB Step
Connector Type: BNC-F
Impedance: 600 ohms
Phone Output: 1/8" Phone Jack, Front Panel

FM AUDIO OUTPUT (70 MHz IF Out)

Level: 1 Vp-p
Response: 300 Hz to 3.3 KHz, -3 dB
Attenuation Range: 30 dB, 1 dB Step
Connector Type: BNC-F
Impedance: 600 ohms

Note: Demod outputs above are for 70 MHz IF output only

PHONE OUTPUT: 1/8" Phone Jack, Front Panel



BUILT IN TEST (BIT)

Power Supply Voltages, Three Phase Lock Alarm, Over Temp.
IF Output Level monitor, based on settable squelch level

CONTROL

Local Manual Control: All Functions, via Alphanumeric Display Keyboard and Rotary Knob
Remote Programming: Ethernet 10/100 base T , RS 485 and RS232

ENVIRONMENTAL

Operating Temp Range: 0° to +50 °C
Non Operating: -30° to +85°C
Relative Humidity: Up to 95%, Non-Condensing
Altitude: 10,000 Feet
EMI: Designed to Meet MIL-STD-461C, CE03 and RE02
Shock: MIL-STD-810E, method 516.4, Procedure VI
Vibration: MIL-STD-810E, method 514.4, Procedure I, Cat 9, Fig 514.4-15
AC Power: 95 to 265 VAC, 47-63 Hz, 180 Watts


MECHANICAL

Size: 19", 2U (3.5" H X 23" D X 17" W)
Weight: 35 Pounds


REAR PANEL CONNECTORS

0.1 to 26.5 GHz RF input: SMA-F
26.5 to 40 GHz RF input: SMA-F
160 MHz IF Output, IF Monitor: SMA-F
70 MHz IF Output: SMA-F
70 MHz Log Video Output: BNC-F
1.8GHz L Output, L Monitor: SMA-F
Video Output: BNC-F
Audio Output: BNC-F
External REF IN, Out: BNC-F
Strobe Input: BNC-F
Ethernet: RJ 45
RS 232: DEM – 9S
RS 485: DEM – 9S

*Specifications are subject to change without notice.

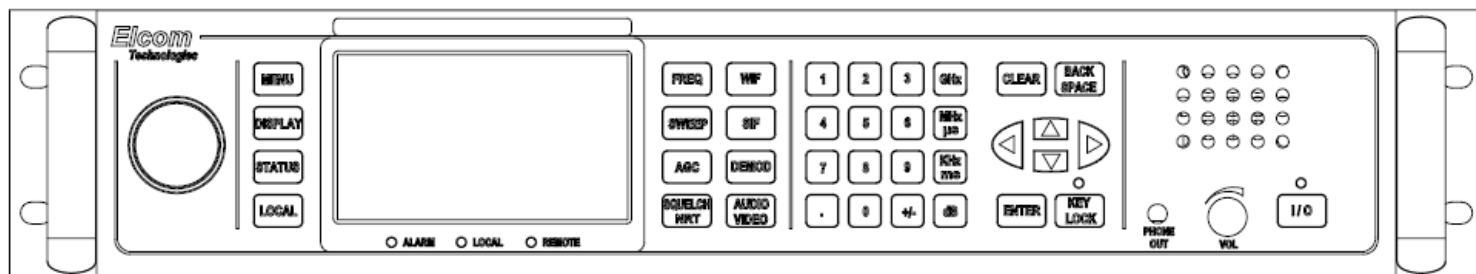

UNIT FRONT VIEW

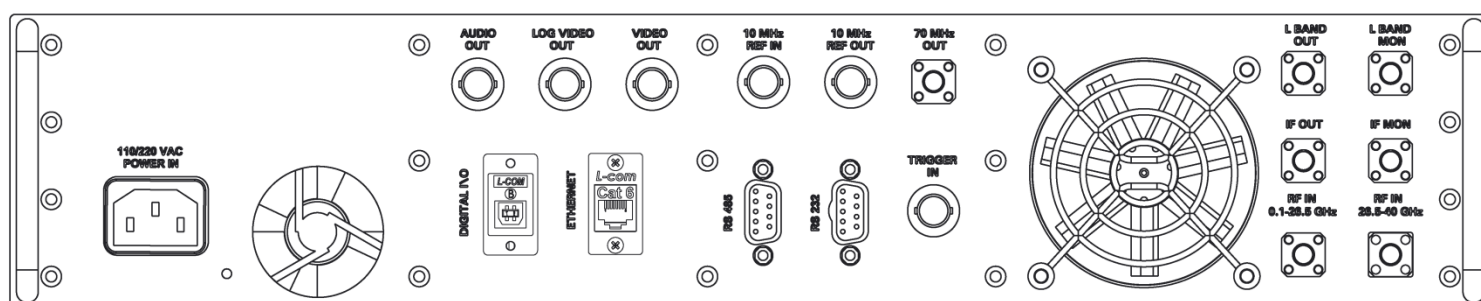

Connector positions subject to change

Ordering Matrix

Frequency Range	Wideband Output Freq.	Wideband BW	FEI-Elcom Part Number
0.1 - 18 GHz	1.8 GHz	1 GHz	SIR-4100-118
0.1 - 26.5 GHz	1.8 GHz	1 GHz	SIR-4100-126
0.1 - 40 GHz	1.8 GHz	1 GHz	SIR-4100-140
2 - 18 GHz	1.8 GHz	1 GHz	SIR-4100-218
2 - 26.5 GHz	1.8 GHz	1 GHz	SIR-4100-226
2 - 40 GHz	1.8 GHz	1 GHz	SIR-4100-240

REAR PANEL CONNECTORS	
RF INPUT (0.1 TO 26.5 GHz)	SMA-F
RF INPUT (26.5 TO 40 GHz)	SMA-F
IF OUTPUT	SMA-F
IF MONITOR	SMA-F
L-BAND OUTPUT	SMA-F
L-BAND MONITOR	SMA-F
70 MHz OUTPUT	SMA-F
TRIGGER INPUT	BNC-F
10 MHz REFERENCE INPUT	BNC-F
10 MHz REFERENCE OUTPUT	BNC-F
AUDIO OUTPUT	BNC-F
LOG VIDEO OUTPUT	BNC-F
VIDEO OUTPUT	BNC-F
RS232, REMOTE INTERFACE	DB-9,F
RS485, REMOTE INTERFACE	DB-9,F
ETHERNET 10/100	RJ-45
DIGITAL I/O	USB, TYPE B
AC POWER INPUT	IEC 60320-1 C14

ABOUT FEI-ELCOM TECH, Inc

Elcom designs and manufactures instruments and modules in the RF and Microwave frequency spectrum for broadband and narrow band applications in ATE, Aerospace/ Defense, SIGINT and commercial communications. Proprietary technologies include low phase noise fast switching direct analog synthesis, low noise indirect PLL designs, and RF DSP up to 40GHz.

Note: These documents may contain FEI-Elcom Tech Proprietary Information and are to be used only for the purposes for which they have been supplied and are not to be duplicated or disclosed in whole or in part without written permission from a duly authorized representative of FEI-Elcom Tech .

****Export of FEI-Elcom Tech products is subject to U.S. export controls. Licenses may be required.**