



SIDC-6100 Series

MICROWAVE WIDEBAND DOWNCONVERTER / TUNER UP TO 40 GHz



**WIDE FREQUENCY RANGE:
0.1 - 40 GHz**

FEATURES

- High Dynamic Range
- Fast Switching Synthesizer with 20 Hz Tuning Resolution
- Excellent Phase Noise Performance: $< 0.5^\circ$ RMS
- Wideband Output: 1.8 GHz CF Output, with 1000, 500, 200 and 100MHz BWs
- IF Output: 160 MHz CF IF Output with selectable BW
- Manual Gain Control with Adjustable Threshold
- Advanced Front Panel Alphanumeric Display
- Ethernet 10/100 BaseT, RS 232, RS 485
- 2 U, 19" Rack

APPLICATION

- ELINT
- Synthetic Instrumentation
- Emission Compliancy Testing
- SATCOM
- Radar Warning Receivers (RWR)



SPECIFICATIONS AT 25°C

FREQUENCY

Frequency Tuning Range:	0.1 – 40 GHz (see ordering matrix page 5 for input frequency options)	
Tuning Resolution:	20 Hz	
Synthesizer Tuning Speed:	50 usec	
Frequency Accuracy vs. Temp (Internal Ref):	< +/- 0.1 PPM	
Long Term Aging (Internal Ref):	< 1 PPM per year	
External Reference Input:	10 MHz at 0 +/- 3 dBm, Auto locking	
Phase Noise (Typ.):	0.5°RMS Integrated from 100 Hz to 10 MHz	
	<u><26.5GHz</u>	<u>26.5-40GHz</u>
Offset 100 Hz:	-68 dBc/Hz	-68 dBc/Hz
Offset 1 KHz:	-87 dBc/Hz	-87 dBc/Hz
Offset 10 KHz:	-95 dBc/Hz	-95 dBc/Hz
Offset 100 KHz:	-101 dBc/Hz	-100 dBc/Hz
Offset 1 MHz:	-117 dBc/Hz	-112 dBc/Hz
Offset 10 MHz:	-130 dBc/Hz	-125 dBc/Hz

SCAN AND SWEEP

Sweep Mode:	F1 to F2 at Selected Frequency Step
Sweep Rate:	<500 usec in-band
Dwell Time:	From 0 to 60 sec, 1 sec step or Stop on Detection
Adjustable Threshold Detection:	1 dB step from -15 dBm to -150 dBm at IF Output
External Trigger:	Strobe Input

RF SECTION

Input VSWR:	2.5 : 1
RF Preselector:	10 Bands (GHz): 0.1-1.33, 1.33-1.75, 1.75-2.0, 2.0-6.0, 6.0-7.5, 7.5-10, 10-13.5, 13.5-18, 18-26.5 and 26.5-40
Noise Figure (30dB Gain):	15 dB (Max.) from 0.1-26.5GHz 17 dB (Max.) from 26.5-40 GHz
Max Input Level (without damage):	+20 dBm (0.1 - 26.5GHz), +10 dBm (26.5 – 40GHz)
Max Input Level (operating):	-15 dBm (20 dB gain)
Conversion Sense:	Non Inverting
RF Gain Variation:	+/- 1.5 dB vs. RF Input Frequency Range



SPECIFICATIONS AT 25°C

DYNAMIC RANGE

Linear Dynamic Range:	80 dB with 1 MHz BW
Image Rejection:	< -70 dB
LO Re-radiation:	< -80 dBm at RF Input
Input IP3:	-5 dBm @ 20 dB Gain
Input 1 dB Compression:	-15 dBm @ 20 dB Gain
Output 1 dB Compression:	+15 dBm @ 30 dB Gain
In Band Spurious, Carrier Dependent (30dB Gain with -15 dBm output level):	-60 dBc typical, -50 dBc max
Internally Generated with 20 dB Gain:	-85 dBm typical, -75 dBm max (equivalent to Input)

WIDEBAND L BAND OUTPUT

Center Frequency:	1.8 GHz
Bandwidth (3dB):	1000MHz, 500MHz, 200MHz, 100MHz selectable (2-40GHz) 200MHz (1.33-2GHz) and 100MHz (0.1-1.33GHz)
RF to IF Gain:	30 dB
Gain Ripple Over 80% IF BW:	+/- 2 dB (Typ), +/- 2.4 dB (Max) from 0.1-40GHz
Gain Slope over 80% IF BW:	< 2.5 dB
Group Delay Variation:	3 nsec max over 80% of 3 dB BW (1000, 500 MHz BW) 6 nsec max over 80% of 3 dB BW (200 MHz BW)
Manual Gain Control (MGC):	Settable 0 to 30 dB, 1 dB Resolution
Impedance:	50 ohms
VSWR:	2:1 Max
Wideband Signal Monitor:	-20 dBc Typical

IF OUTPUT

Center Frequency :	160 MHz
Bandwidth (3 dB):	1, 5, 10, 20, 40 & 80 MHz selectable
Gain Flatness Over 80% IF BW:	+/- 0.8 dB (Typ.), +/- 1.2 dB (Max.)
RF to IF Gain:	30 dB
Manual Gain Control (MGC):	Settable 0 to 30 dB, 1 dB Resolution
IF Output Impedance:	50 ohm
VSWR:	2.0:1 Max
IF Signal Monitor:	-20 dBc (Typ.)



BUILT IN TEST (BIT)

Power Supply Voltages, Three Phase Lock Alarm, Over Temp.
IF Output Level monitor

CONTROL

Local Manual Control: All Functions, via Alphanumeric Display Keyboard and Rotary Knob
Remote Programming: Ethernet 10/100 base T , RS 485 and RS232

ENVIRONMENTAL

Operating Temp Range: 0° to +50 °C
Non Operating: -30° to +85°C
Relative Humidity: Up to 95%, Non-Condensing
Altitude: 10,000 Feet
EMI: Designed to Meet MIL-STD-461C, CE03 and RE02
Shock: MIL-STD-810G, Method 516.6, Procedure VI
Vibration: MIL-STD-810G, Method 514.6, Procedure I
AC Power: 95 to 265 VAC, 47-63 Hz, 170 Watts (40GHz) or 140 Watts (18GHz)


MECHANICAL

Size: 19", 2U (3.5" H X 23" D X 17" W)
Weight: 35 Pounds


REAR PANEL CONNECTORS

0.1 to 26.5 GHz RF input: SMA-F
26.5 to 40 GHz RF input: SMA-F
160 MHz IF Output, IF Monitor: SMA-F
1.8GHz L Output, L Monitor: SMA-F
External REF IN, Out: BNC-F
Strobe Input: BNC-F
Ethernet: RJ 45
RS 232: DEM – 9S
RS 485: DEM – 9S

*Specifications are subject to change without notice.

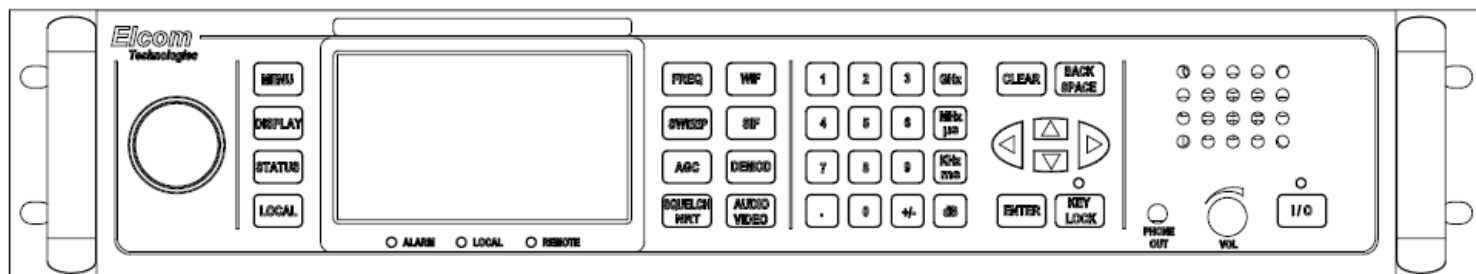

UNIT FRONT VIEW

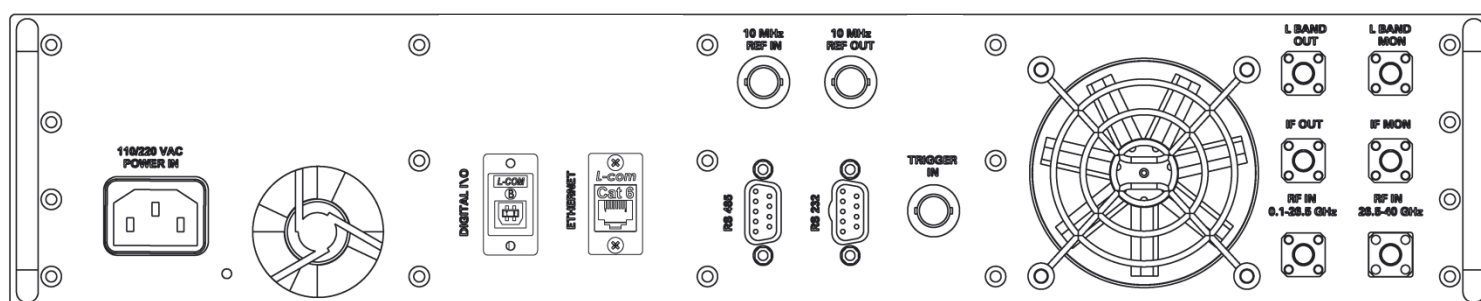

Connector positions subject to change

Ordering Matrix

Frequency Range	Wideband Output Freq.	Wideband BW	FEI-Elcom Part Number
0.1 - 18 GHz	1.8 GHz	1 GHz	SIDC-6100-118
0.1 - 26.5 GHz	1.8 GHz	1 GHz	SIDC-6100-126
0.1 - 40 GHz	1.8 GHz	1 GHz	SIDC-6100-140
2 - 18 GHz	1.8 GHz	1 GHz	SIDC-6100-218
2 - 26.5 GHz	1.8 GHz	1 GHz	SIDC-6100-226
2 - 40 GHz	1.8 GHz	1 GHz	SIDC-6100-240

REAR PANEL CONNECTORS	
RF INPUT (0.1 TO 26.5 GHz)	SMA-F
RF INPUT (26.5 TO 40 GHz)	SMA-F
IF OUTPUT	SMA-F
IF MONITOR	SMA-F
L-BAND OUTPUT	SMA-F
L-BAND MONITOR	SMA-F
TRIGGER INPUT	
10 MHz REFERENCE INPUT	BNC-F
10 MHz REFERENCE OUTPUT	BNC-F
RS232, REMOTE INTERFACE	DB-9,F
RS485, REMOTE INTERFACE	DB-9,F
ETHERNET 10/100	RJ-45
DIGITAL I/O	USB, TYPE B
AC POWER INPUT	IEC 60320-1 C14

ABOUT FEI-ELCOM TECH, Inc

Elcom designs and manufactures instruments and modules in the RF and Microwave frequency spectrum for broadband and narrow band applications in ATE, Aerospace/ Defense, SIGINT and commercial communications. Proprietary technologies include low phase noise fast switching direct analog synthesis, low noise indirect PLL designs, and RF DSP up to 40GHz.

Note: These documents may contain FEI-Elcom Tech Proprietary Information and are to be used only for the purposes for which they have been supplied and are not to be duplicated or disclosed in whole or in part without written permission from a duly authorized representative of FEI-Elcom Tech .

****Export of FEI-Elcom Tech products is subject to U.S. export controls. Licenses may be required.**