



VMEST

SYNTHESIZED TUNER SPECIFICATION



WIDE FREQUENCY RANGE:
0.5 to 18 GHz

FEATURES

- 70 dB Selectivity
- 45 dB Gain Adjustment
- 1 GHz/ 140 MHz IF
- Up To 500 MHz Bandwidth

BENEFITS

- Light Weight
- Small Size
- Low Cost
- High Performance



OPTIONS

- Frequency Range: 0.05 to 26 GHz
- Fast Tune Mode: 250 usec Full Band
- IF Bandwidth: 1 MHz to 500 MHz
- IF Frequency: Selectable to 1 GHz
- Tuning Resolution: Selectable to 1 Hz
- Ethernet Interface
- GPIB Interface
- RS-232 Interface

APPLICATION

- SIGINT
- EW
- Flight Line Testers
- COMINT
- ELINT

GENERAL DESCRIPTION

THE VMEST-18 SYNTHESIZED TUNER was developed as a "Synthetic Instrument" for flight line test equipment, where its small size, light weight and high performance characteristics are paramount. The modular design of this instrument allows for many performance and interface options. Elcom's VME Series synthesizers are similar in design to the IBS Series with the added benefit of an extremely compact 3-4 slot design.




SPECIFICATIONS

Tuning Accuracy:	+/- 50 KHz
Tuning Resolution:	100 KHz
Tuning Speed:	1 msec/ 500 MHz 20 msec/ Full Band
Maximum Input Power:	+20 dBm
Output level:	0 dBm Nominal
Gain:	30 dB Nominal, 45 dB Max
Noise Figure:	14 dB max
MDS:	-90 dBm
IF Frequency:	70 MHz or 140 MHz
IF Bandwidth:	20 MHz
Image Rejection:	70 dB max
External Reference:	10 MHz @ +0 dBm
Phase Noise:	-95 dBc / Hz @ 10 KHz Offset
DC Power:	+5V, +/- 12V, 50 Watts
Form Factor:	VME 3-4 Slots
Interface:	VME 64
Environmental Conditions:	
Operating Temperature:	-20° C to +60° C
Non-Operating:	-40° C to +70° C
Weight:	9 lbs



OPT100	Fast Tune Mode, 250 usec Full Band
OPT 101	IF Bandwidth, 1 MHz
OPT 102	IF Frequency, Selectable to 1 GHz
OPT 103	Tuning Resolution, Selectable to 1 Hz
OPT 104	Ethernet Interface
OPT 105	GPIB Interface
OPT 106	RS-232 Interface

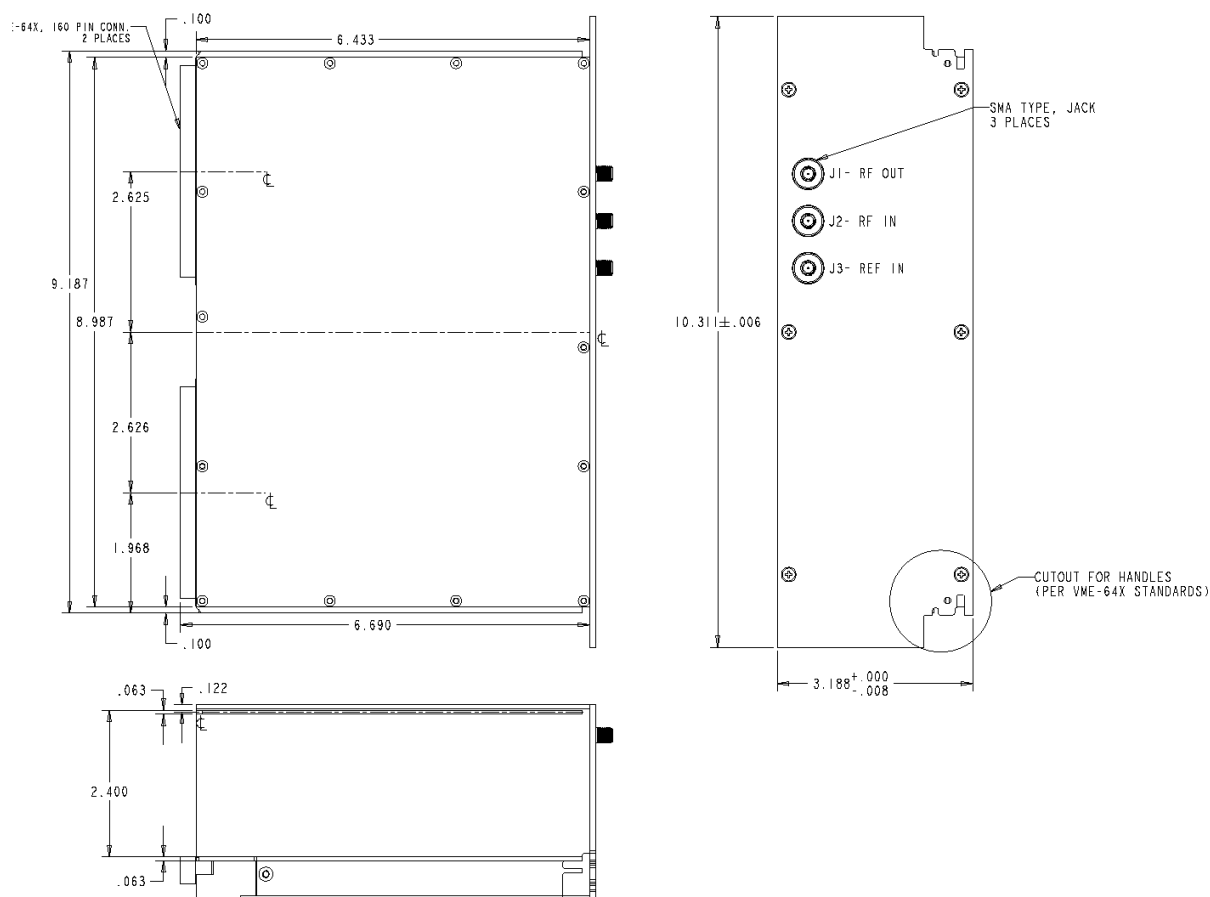

VMEST Synthesized Tuner Mechanical Outline



ABOUT ELCOM TECHNOLOGIES

Elcom designs and manufactures instruments and modules in the RF and Microwave frequency spectrum for broadband and narrow band applications in ATE, Aerospace/Defense, SIGINT and commercial communications. Proprietary technologies include low phase noise fast switching direct analog synthesis, low noise indirect PLL designs, and RF DSP up to 40GHz.

FOR ADDITIONAL INFORMATION PLEASE CONTACT

Elcom Technologies, Inc.

11 Volvo Drive

Rockleigh, New Jersey 07647

Tel: (201) 767-8030

Fax: (201) 767-1326

sales@elcom-tech.com

Note: These documents may contain Elcom Proprietary Information and are to be used only for the purposes for which they have been supplied and are not to be duplicated or disclosed in whole or in part without written permission from a duly authorized representative of Elcom Technologies.

***Export of Elcom Technologies products is subject to U.S. export controls. Licenses may be required.*